



雅晶石色卡

- Gamazine paint -

 **vanlei万磊®**

沉浆™技术
WANLEI CHEN JIANG TECHNOLOGY

原理：我们在质感系列的涂料中添加了一种活性成分，它将使得遮盖物吸附于基底，形成先从底面干燥再到表面干燥的逆向顺序，有效形成了对基底的保护层。底面干燥后，能杜绝表面施工受到的影响。因此，能保证底面不发花，不返底。我们将这种技术称为“沉浆™技术”。



YJS - 0761 (100g浅)



YJS - 1311 (100g浅)



YJS - 0521 (100g浅)



YJS - 0101 (100g浅)



YJS - 0122 (100g浅)




YJS - 0141 (100g浅)



YJS - 0911 (100g浅)



YJS - 0102 (100g浅)

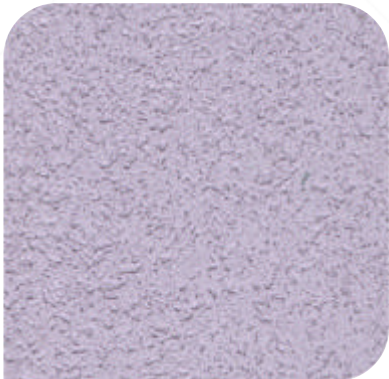

YJS - 0402 (100g浅)



YJS - 0562 (100g浅)



YJS - 0525 (100g浅)



YJS - 0403 (100g深)

注意：由于石材来源于天然，颜色有少许偏差实属正常，间隔时间 提货，颜色有所偏差，恕不另行通知。

Note: due to the natural source of stone, it is normal that there is a little deviation in color. It is normal to pick up the goods at an interval. If there is a deviation in color, no notice will be given.

配方升级，2019年版本的全系列雅晶石颜色将会相对偏浅，敬请留意。

The formula is upgraded. The color of the whole series of yaspars in 2019 will be relatively light. Please pay attention.



YJS - 0292 (100g浅)



YJS - 0392 (100g浅)



YJS - 0381 (100g浅)



YJS - 1362 (100g浅)



YJS - 0901 (100g浅)



YJS - 0902 (100g浅)




YJS - 0152 (100g深)



YJS - 0091 (100g深)



YJS - 0081 (100g深)

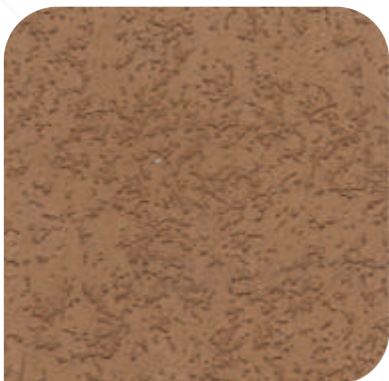

YJS - 0155 (500g深)



YJS - 0906 (100g深)



YJS - 0112 (100g深)

注意：由于石材来源于天然，颜色有少许偏差实属正常，间隔时间 提货，颜色有所偏差，恕不另行通知。

Note: due to the natural source of stone, it is normal that there is a little deviation in color. It is normal to pick up the goods at an interval. If there is a deviation in color, no notice will be given.



雅晶石包装

- 雅晶石，精选每颗岩石颗粒，每一粒饱满的砂子都带有独特的光辉，冠以独特的流水型花纹。其柔和、淡雅的色彩，“万磊”在追求整体美感的同时，更凸显了居室墙面的独一无二。
- Gamazine Paint selects rock particles as raw materials, so each sand has its unique brilliance. With it' s soft and elegant color, gamazine paint pursues the overall aesthetic feeling, and also highlights the uniqueness of your wall.
- 配套工具：羊毛辊筒、批刀、刮板
- Tools: Wool roller, knife, scraper
- 产品净重：25kg/桶
- Net weight: 25kg / barrel
- 涂布面积：12 - 15m²
- Coating area: 12-15 sqm



YJS - 0101银 (100g浅)

360° VR体验



YJS - 0101金 (100g浅)

360° VR体验



注意：由于石材来源于天然，颜色有少许偏差实属正常，间隔时间 提货，颜色有所偏差，恕不另行通知。

Note: due to the natural source of stone, it is normal that there is a little deviation in color. It is normal to pick up the goods at an interval. If there is a deviation in color, no notice will be given.



Gamazine Paint | 雅晶石

雅晶石

雅晶石，精选每颗岩石颗粒，每一粒饱满的砂子都带有独特的光辉，冠以独特的流水型花纹。其柔和、淡雅的色彩，“万磊”在追求整体美感的同时，更凸显了居室墙面的独一无二。

主要成分：

纳米乳、精选岩石颗粒、无机棒土、纳米碳酸钙粉、纯净水

产品特点：

- A、精选岩石颗粒，粒粒饱满如金子
- B、天然色彩，柔韧厚重的材质
- C、多种艺术风格，随心选择
- D、无缝，无有害物质，防水耐污性强

适用范围：

欧美艺术风格、内外墙适用
(高级的宴会厅、商业酒店、大堂、别墅)

配套体系：

无机抗碱底漆+雅晶石 (RY型)+ 有光 (哑光) 保护膜

产品净重：18L

配套工具：羊毛辊筒、批刀、刮板

基面要求：

- ①必须使用耐水腻子粉，表面平整无脱落或掉粉现象。
- ②(轻微)掉粉时：辊涂无机养护液(兑水10-20%)一遍，12小时后再施工。

施工方法：

- ①辊涂无机抗碱底漆，必须完全封闭基层
- ②用批刀薄批、找平一遍(可允许有漏底现象)。
- ③薄批第二遍，未干前用刮板，打圈刮出“虫蛀”纹理。
- ④表干后，用批刀回压抛光即可。
- ⑤干燥后轻微打磨，辊涂有光 (哑光) 保护膜。

保质期：

常温干燥状态下12个月 (原装出厂时)

Gamazine Paint - YJS

Gamazine Paint selects rock particles as raw materials, so each sand has its unique brilliance. With it' s soft and elegant color, gamazine paint pursues the overall aesthetic feeling, and also highlights the uniqueness of your wall.

Main raw materials:

Emulsion, Selected fine sand, Attapulgite, Calcium Carbonate powder, Water

Features:

- Selected Raw Materials - Select full rock particles creat excellent textured effect
- Various Artistic Styles - Textured effect can satisfied different decoration styles
- Strong Waterproof and Stain Resistance - Never afraid of stains
- Rich Color Selection - White based material + color paste
- Environmental Protection - Free from harmful substances
- Barrier-free Construction - No seams in whole wall
- Superior Decorative Effect - Textured building style

Tools: wool roller, knife, scraper

Related products products:

Interior / Exterior alkali resistant primer + Gamazine Paint - YJS + Topcoat (required for exterior)

Net weight: 25kg

Coating area: 12-15 sqm

Color selection: white base material + pigment

Substrate requirements:

- (1)Water-resistant putty powder must be used, and keep the surface smooth without falling off or falling powder phenomenon.

- (2) If powder falling off slightly : roll alkali resistant primer (mixing with 10-20% water) once, continue construction after 12 hours.

Construction method:

- (1) Roll alkali resistant primer until completely cover the substrate.
- (2) Batch the material onto the wall with knife
- (3) Batch again, and scrape in a circle for the "moth" texture
- (4) After the surface dried, pressure-polish-ing with a batch knife
- (5) After drying, polish it slightly and roll topcoat (required for exterior)



产品净重：25kg/桶

涂布面积：12 - 15m²

Coating area: 12-15 sqm

Net weight: 25kg



雅晶石施工教程



雅晶石VR赏析



石文化系列 9 大优势

- ✓ 施工无阻力
Easy to construct
- ✓ 无接茬
No lapping defect
- ✓ 防返白
No whitening
- ✓ 无流挂
No curtains
- ✓ 平滑丰满
Smooth and saturation
- ✓ 真石效果
Natural stone effect
- ✓ 保水性强
Strong water retention
- ✓ 长保不分层
Long service life
- ✓ 超低损耗
Ultra low loss material



S T O N E

万磊建筑涂料有限公司
WANLEI BUILDING PAINT CO.,LTD



广东生产基地（代码 FS）
广东省佛山市南海区松岗万石工业区

广州分公司
广州市荔湾区羊城装饰材料市场118号

广西生产基地（代码 QT）
广西壮族自治区贵港市覃塘区产业园甘化园区

南宁分公司
广西壮族自治区南宁市兴宁区快环建材市场

全国客服热线
4000-147-187
www.fswanlei.com

△ 注意：
公司根据产品技术和发展需要，有权对产品配方进行更新升级，而不对外另行公布，请以最新样板册颜色为准，不便之处，敬请原谅！